



Product Overview

PolySwitch BD280 Bladed Contact
Resettable Overcurrent Protection



KEY FEATURES

- 2.8mm terminals
- Latches on first trip
- PTC resistance switching action
- Constant wattage power dissipation when tripped
- Solid state construction
- Probe points
- Bright color coded housing
- Low thermal derating

APPLICATIONS

- Automotive and heavy trucks circuits
- Wiring harness protection
- 12V power outlets
- Intermittent duty circuits (with high inrush current)
- DC motor circuits
power window, power seat, power door lock, fuel & trunk door release, others
(needing to survive lock rotor conditions)

BENEFITS

- Easy to implement, reliable solid state resettable overcurrent protection
- Reduces fault energy delivered to the wiring and loads
- Long, safe performance life
- Resilient at minimum and maximum voltage
- Not subject to change in calibration due to rough handling or high shock and vibration
- Facilitates fault finding
- Less chance of mis-installation
- Color recognition inspection possible
- Offers resettable overcurrent protection even in vehicle underhood applications

FUNCTION

- Directly replaces mini-sized automotive fuses and circuit breakers
- No cycling into short or overload
- No contacts to erode or weld together
- Virtually constant power consumption across voltage range 4V to 16V
- Very high resistance to shock and vibration
- Easier diagnostics
- Easily recognizable current rating
- Passes more current at higher temperatures than bi-metal circuit breakers


ELECTRICAL CHARACTERISTICS

Nominal Operating Voltage:	14V
Maximum Operating Voltage:	16V
Current Ratings:	10A, 15A, 20A, 25A, 30A
Cycle Life:	1,000 cycles @ 100A fault current
Trip Endurance:	1,000 hours @ 14V
Load Dump:	Per ISO 7337-1

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-40°C to +125°C
Vibration:	Meets or exceeds SAE J553
Mechanical Shock:	Meets or exceeds SAE J553
Thermal Shock:	Meets or exceeds SAE J553
Humidity:	Meets or exceeds SAE J553
Cap Retention:	90N (20lbf)

THERMAL DERATING

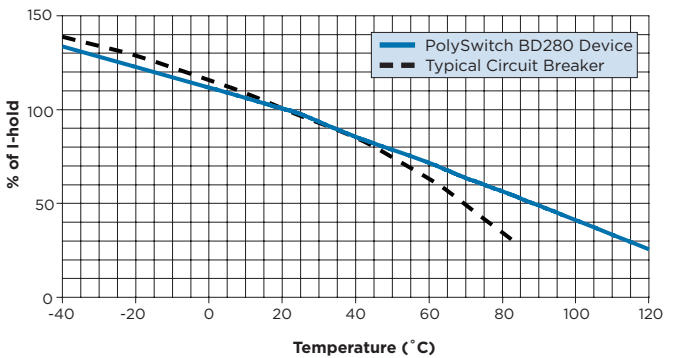

PolySwitch bladed devices exhibit much less roll-off at high temperatures which allows for their use in underhood applications.

INTERRUPT CURRENT AND VOLTAGE DROP MEETS OR EXCEEDS SAE J553


Current Ratings (A)	I Interrupt* (A)	Max. Voltage Drop (mV) @ Current Rating
10	225	180
15	300	160
20	450	135
25	450	115
30	450	105

* Tested to 5 cycles

ENVIRONMENTAL SPECIFICATIONS

Box Material:	PBT meeting UL V-0 requirements
Terminal Material:	Brass with Tin over Nickel plating


TRIP CHARACTERISTICS

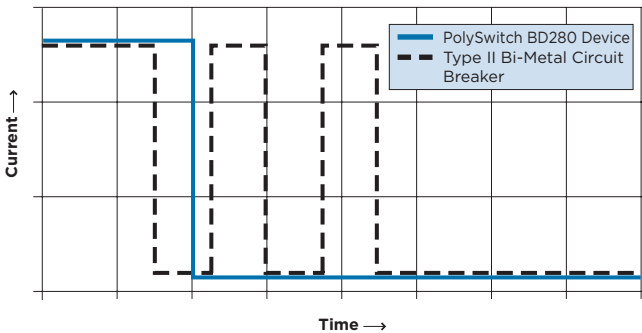


PolySwitch BD280 device latches after the first overcurrent trip, whereas Type II bi-metal circuit breakers typically cycle several times.

PART NUMBERS, STYLES AND DIMENSIONS

Part Numbers	Current Ratings	Body Style	mm Min/Max (inch approx.)								
			A	B	C	D	E(x2)	F	G	H	I
BD280-1130-10/16	10A	1	29.5/30.1 (1.173/1.185)	8.7/9.3 (0.343/0.366)	10.75/11.25 (0.423/0.443)	6.05/6.65 (0.238/0.262)	2.55/3.05 (0.1/0.12)	3.3/3.9 (0.13/0.154)	3.4/4 (0.134/0.157)	1.7/2.3 (0.067/0.091)	10.9/11.5 (0.429/0.453)
BD280-1130-15/16	15A	1	29.5/30.5 (1.173/1.185)	8.7/9.3 (0.343/0.366)	10.75/11.25 (0.423/0.443)	6.05/6.65 (0.238/0.262)	2.55/3.05 (0.1/0.12)	3.3/3.9 (0.13/0.154)	3.4/4 (0.134/0.157)	1.7/2.3 (0.067/0.091)	10.9/11.5 (0.429/0.453)
BD280-1130-20/16	20A	1	29.5/30.1 (1.173/1.185)	8.7/9.3 (0.343/0.366)	10.75/11.25 (0.423/0.443)	6.05/6.65 (0.238/0.262)	2.55/3.05 (0.1/0.12)	3.3/3.9 (0.13/0.154)	3.4/4 (0.134/0.157)	1.7/2.3 (0.067/0.091)	10.9/11.5 (0.429/0.453)
BD280-1927-25/16-W	25A	2	26.65/27.35 (1.049/1.077)	8.6/9.2 (0.339/0.362)	10.75/11.25 (0.423/0.443)	6.05/6.65 (0.238/0.262)	2.55/3.05 (0.1/0.12)	1.8/2.2 (0.071/0.087)	3.5/3.9 (0.138/0.154)	1.7/2.3 (0.067/0.091)	19/19.4 (0.748/0.764)
BD280-1927-30/16-W	30A	2	26.65/27.35 (1.049/1.077)	8.6/9.2 (0.339/0.362)	10.75/11.25 (0.423/0.443)	6.05/6.65 (0.238/0.262)	2.55/3.05 (0.1/0.12)	1.8/2.2 (0.071/0.087)	3.5/3.9 (0.138/0.154)	1.7/2.3 (0.067/0.091)	19/19.4 (0.748/0.764)

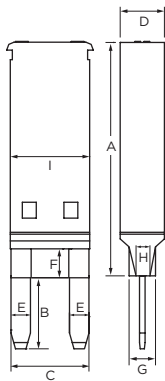

Body Style 1

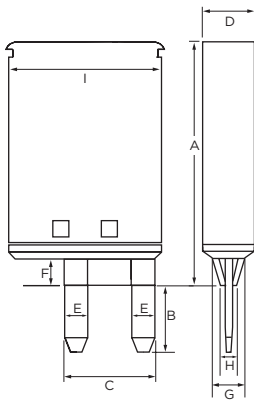

Body Style 2

FOR MORE INFORMATION

TE Circuit Protection

308 Constitution Drive
Menlo Park, CA USA 94025-1164
Tel : (800) 227-7040, (650) 361-6900
Fax : (650) 361-4600

www.circuitprotection.com
www.circuitprotection.com.hk (Chinese)
www.te.com/japan/bu/circuitprotection/ (Japanese)

Brazil

Tel : 55-11-2103-6090
Fax: 55-11-2103-6216

UK / Eire / Benelux / Israel

South Africa / Nordic / Baltic / Others
Tel : 49-89-6089485
Fax: 49-89-6089394

Germany / Austria / Switzerland / Eastern Europe / Russia

Tel : 49-89-6089584
Fax: 49-89-6089394

France / Italy / Iberia / Greece / Turkey

Tel : 33-1-34208455
Fax: 33-1-34208479

Japan

Tel : 81-44-900-5110
Fax: 81-44-900-5140

Korea

Tel : 82-2-3415-4654
Fax: 82-2-3486-1786

Taiwan

Tel : 886-2-8768-2788 x 211
Fax: 886-2-8768-1277

China, Hong Kong

Tel : 852-2738-8181
Fax: 852-2735-1185

China, Beijing

Tel : 86-10-6569-3488 x 16526
Fax: 86-10-6569-3206

China, Shanghai

Tel : 86-21-6106-7379
Fax: 86-21-6485-3255

China, Shenzhen / Guangzhou

Tel : 86-755-2515-4797
Fax: 86-755-2598-0419

Singapore / Indonesia

Tel : 65-6590-5089
Fax: 65-6481-9377

Thailand / Malaysia / Vietnam

Tel : 6-04-217-8112
Fax: 6-04-229-8177

Australia / Philippines

Tel : 63-2-988-9465
Fax: 63-2-848-0205

India

Tel : 91-80-4161-3745
Mobile : 91-99-0248-8886

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise.
*as defined www.te.com/leadfree

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.
RCP0023E 07/2011

PolySwitch, TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

