


.050" Loose Twisted Pair Cable

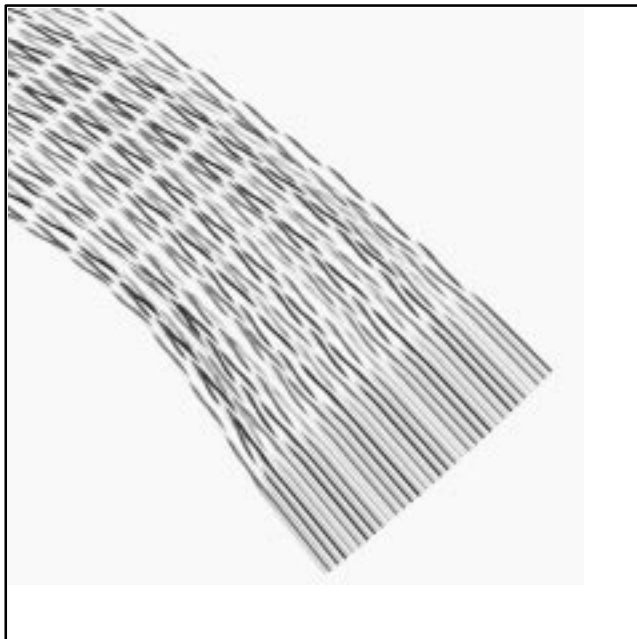

Interconnect Solutions Technical Specification

<http://www.3M.com/interconnects/>

- 3782 Series
- Flat Cable
- Mass Terminable
- 28 AWG Stranded Conductors
- PVC Insulation

TS-0999-02

7

Fast Facts

- Combines the advantages of loose twisted pairs with flat sections for mass termination IDC termination
- Zippable for branching or discrete termination
- Color coded conductors for easy identification
- Reduced crosstalk for balanced drive applications with twisted pair construction
- Greater routing flexibility with the loose twisted pairs as compared to solid laminated cable

Ordering Information

3782/XXTV

Number of Conductors—

**Offered in conductor sizes 10 - 64, in standard lengths of 100 feet per roll.
Please call for other conductor counts and roll lengths.**

Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture as of the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY FOR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000