

.050" × .050" CF Card Header

Type II, Surface Mount, Normal Polarization



- Meets CFA standards — known reliability
- Single row solder tails — 0.635 mm
- Board component clearance — 0.00 or 2.00 mm standoff
- Ejector option — easy removal of CF Card from right angle header
- Longer guide rails with grounding clip - easy insertion
- “Telcordia” compliant plating option

Date Modified: February 9, 2001

TS-0890-11
Sheet 1 of 4

39

Physical

Insulation

Material: Liquid Crystal Polymer (LCP)

Flammability: UL 94V-0

Color: Beige

Contact

Material: Phosphor Bronze

Plating

Underplate: 50 μ " [1.27 μ m] Nickel — QQ-N-290, Class 2

Wiping Area: Gold Flash over 80/20 Palladium Nickel

Solder Tails: 100 μ " [2.54 μ m] 90/10 Tin Lead — MIL-P-81728

Electrical

Current Rating: .5 A

Insulation Resistance: $>1 \times 10^9 \Omega$ at 500 Vdc

$>1 \times 10^8 \Omega$ at 500 Vdc after Environmental Conditioning

Withstanding Voltage: 500 Vrms at Sea Level

Environmental

Temperature Rating: -55°C to +85°C

Process Rating: Maximum 235°C, with 90 seconds over 215°C


3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

.050" × .050" CF Card Header

Type II, Surface Mount, Normal Polarization

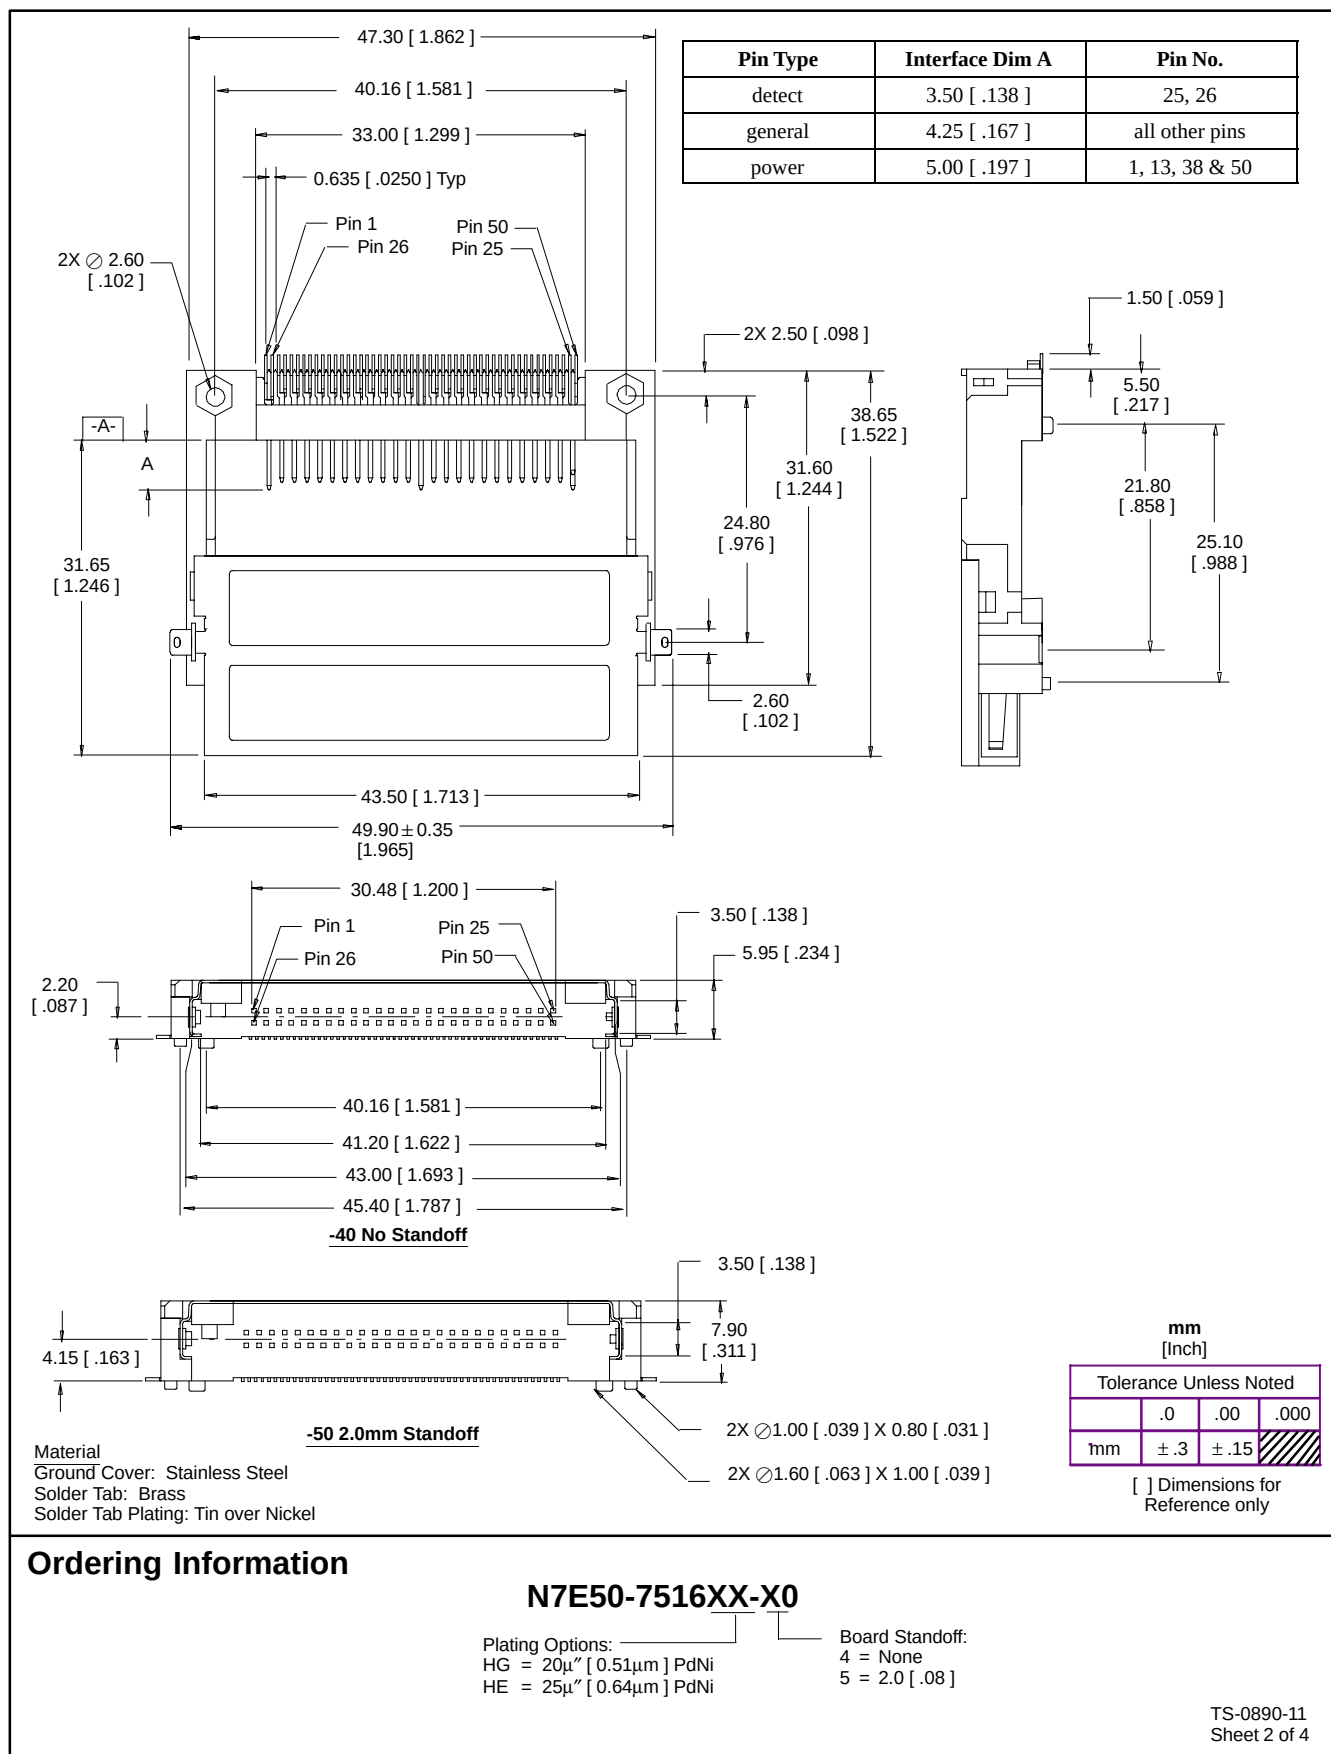


3M Interconnect Solutions Division

6801 River Place Blvd.
 Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373


Type II, Surface Mount, Normal Polarization

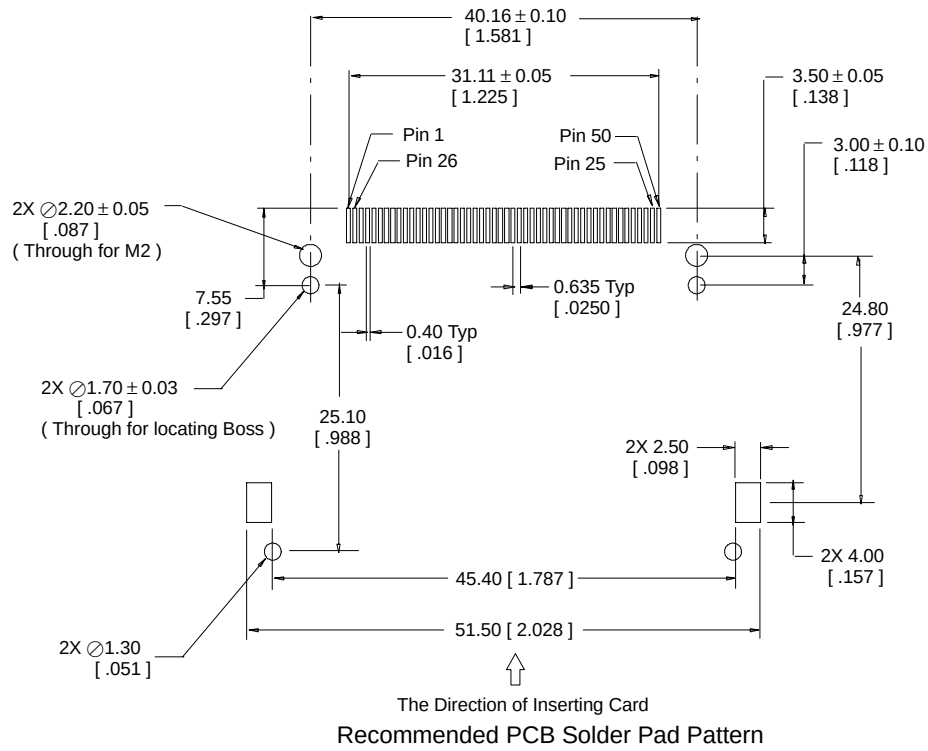

TS-0890-11
Sheet 3 of 4

.050" × .050" CF Card Header

Type II, Surface Mount, Normal Polarization

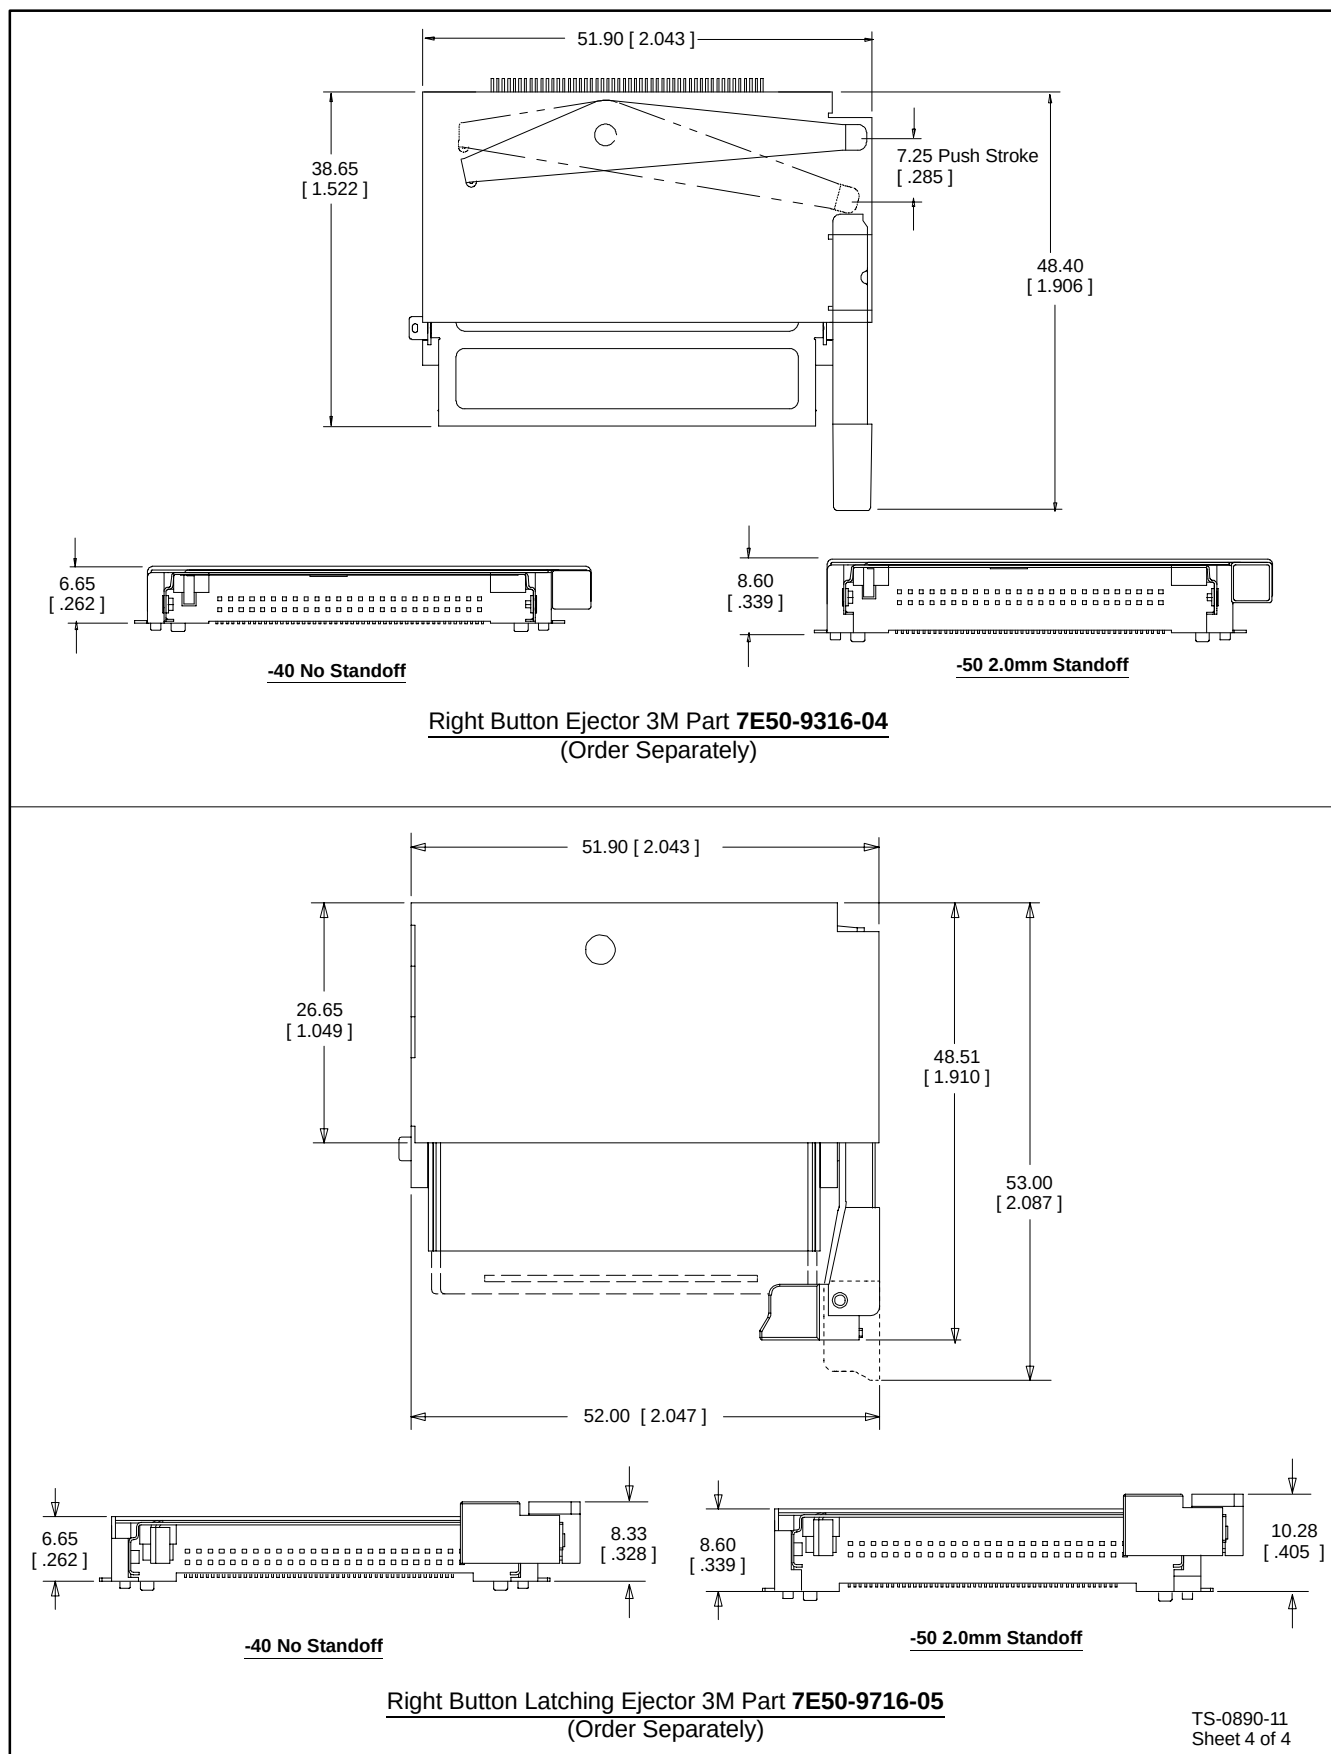

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373