

## INTRODUCING THE SHIELDED MINI-CON-X® CONNECTOR

### Features and Benefits

- Complete replacement for MINI-CON-X®
- Panels are factory assembled and sealed
- Scoop-proof connector design
- Anti-slip machined nut standard on panel connectors
- Precision machined housings
- Two shell sizes & multiple keying arrangements

### Product Specifications

#### Materials

##### **Panel Shell, Cable Housing & Coupling Nuts:**

Nickel plated copper alloy

##### **All Connector Inserts:** Engineered Polyester Resin

**Contacts:** Gold plated copper alloy with nickel underplate

**Backshell & Strap:** G.F. Nylon

**O-Rings:** Neoprene

**Screws:** Stainless Steel

#### Mechanical

**Shock:** Method 213, Mil-Std 202

**Vibration:** Method 201, Mil-Std 202

**Life:** 400 insertion/withdrawl cycles

#### Electrical

**Voltage Rating:** Tested at 600 VRMS

**Insulation Resistance:** Method 302, Mil-Std 202

**Contact Resistance:** Method 307, Mil-Std 202

##### **Current Ratings:**

13A: 4 maximum #16 contact with 16 AWG

7.5A: 3 maximum #20 contacts with 20 AWG

5.6A: 12 maximum #20 contacts with 20 AWG

#### Environmental

**Temperature Rating:** -40°C (-40°F) to +85 °C (+185°F)

**Thermal Shock:** Method 107, Mil-Std 202

**Moisture/Salt Spray:** Method 106F / 101 Mil-Std 202

#### Product Ratings

IP66 / IP68 (when mated)

RoHS Compliant



Mated Cable End  
and Panel Mount




Cable End




Epoxy Sealed  
Panel Mount

# Shielded MINI-CON-X® Connector


## Cable End

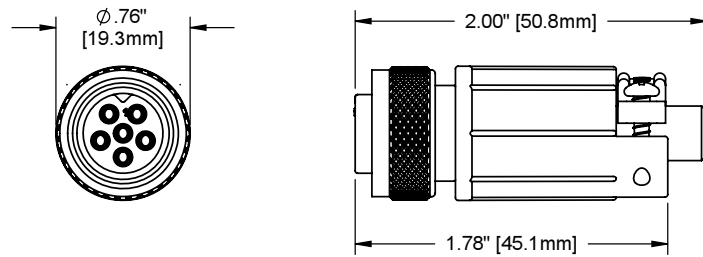

## Panel Mount

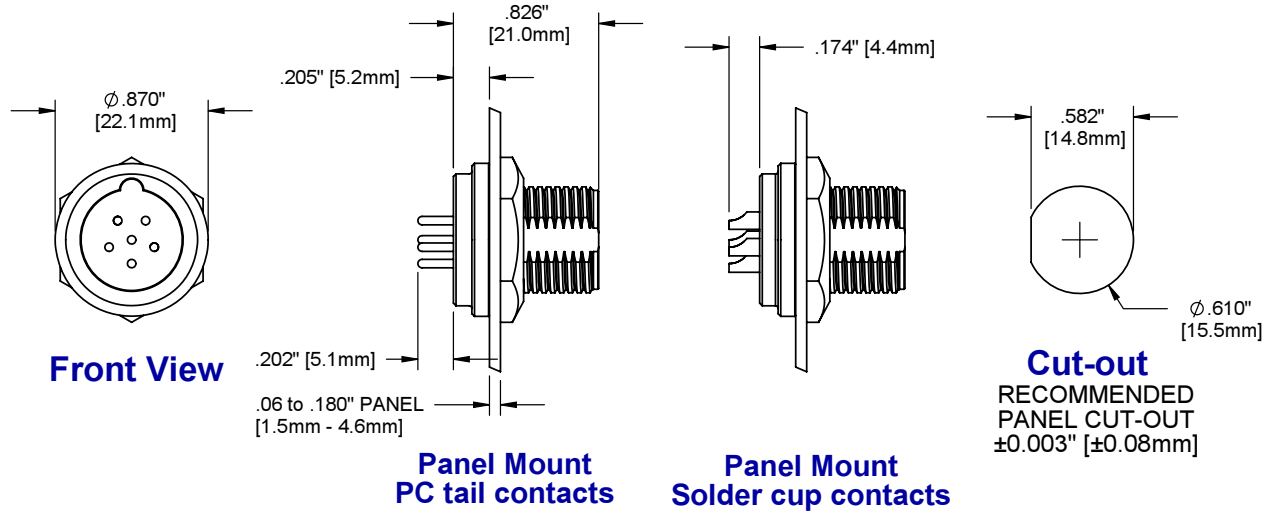

## Contact Arrangements (Wiring View of Cable End)

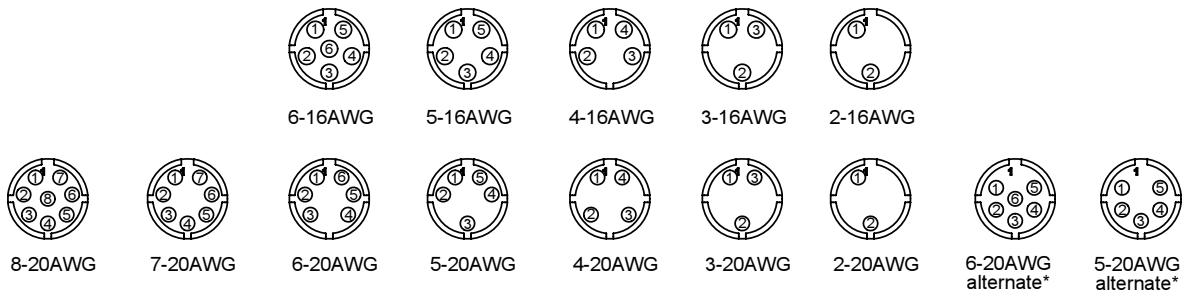

\* Consult Factory

## Code Logic

