

CP-6.5 Wire-to-Board Connectors, 2, 4 and 6 circuits

6.50mm Pitch, Polarized with Key and Color-Coding

molex[®]

Leveraging full keying and color-pairing features, foolproof CP-6.5 wire-to-board connectors enhance user-safety while speeding up consumer and industrial interconnect assembly applications

Features and Benefits

Wide spectrum of housing colors

Allows quick identification of mating combination for assembly and repair

Polarization keys on housing rib

Eliminate mis-mating and consequent electrical shorting of application

Positive lock feature on housing

Produces an audible click when fully mated

Kinked soldertails


Provide added header-to-PCB retention during solder reflow

Absence of drain-holes in PCB headers


Ensure compatibility with conformal coating (potting)

Headers are 260°C wave-solder-process capable

Ideal for high-temperature assembly processing

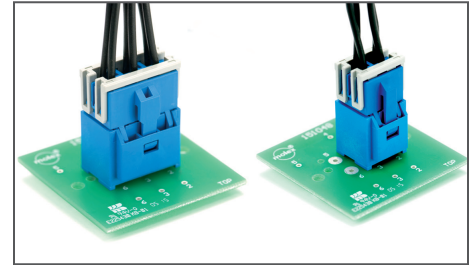

4- and 6-circuit extensions of the CP-6.5 Connector Family

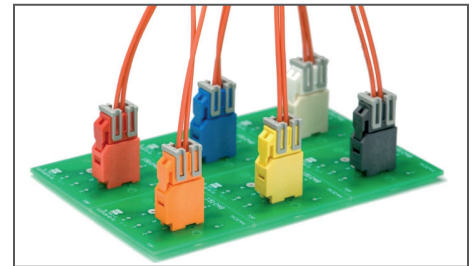

2-circuit, 6.50mm Wire-to-Board Connectors, fully polarized with key and color-coding

Applications

Consumer / Home Appliances

Washing machines

Water heaters

Air-conditioners

Industrial / Industrial Automation

Industrial controls

HVAC

Copiers

Vending machines

Security systems



Copier Machines



Home Appliances



Water Heaters



Air Conditioning System



Vending Machines


CP-6.5 Wire-to-Board Connectors, 2, 4 and 6 circuits

6.50mm Pitch, Polarized with Key and Color-Coding


molex[®]

Product Family

4-Circuit Housings

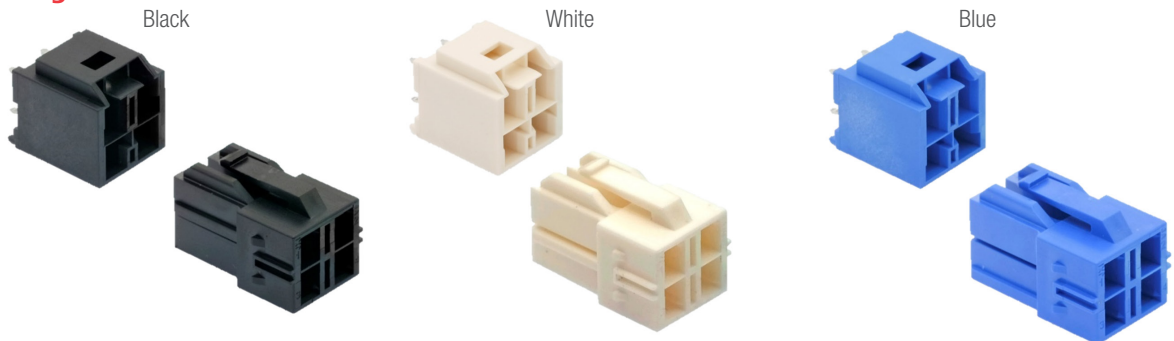

6-Circuit Housings

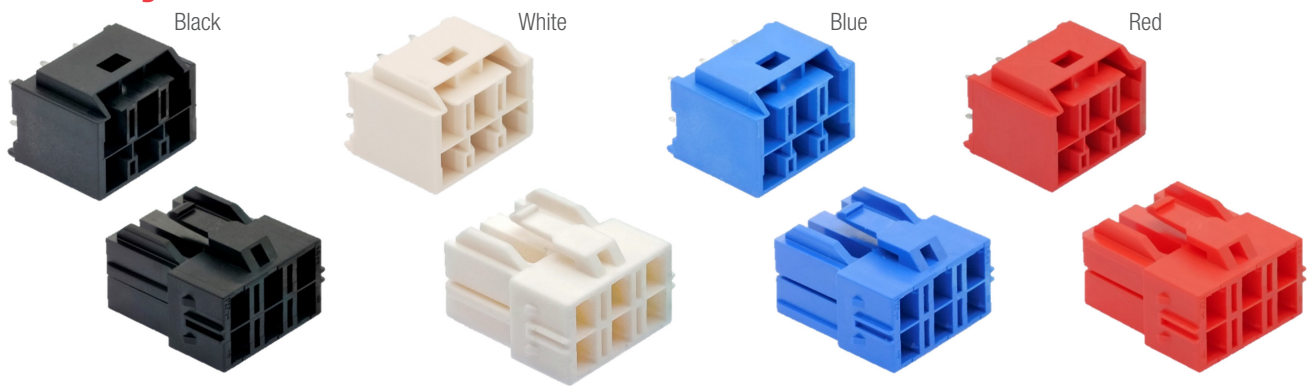


Color Coding and Fully Polarized Keying Features

Left picture shows a matching and mating combination comprising receptacle and PCB header with the same color and complementing keying features


Right picture shows a mis-match of header and receptacle – both their colors and keying features do not match

Match

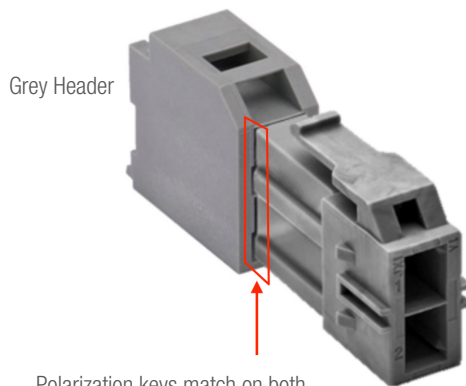

Like-color connectors mate

Mis-match

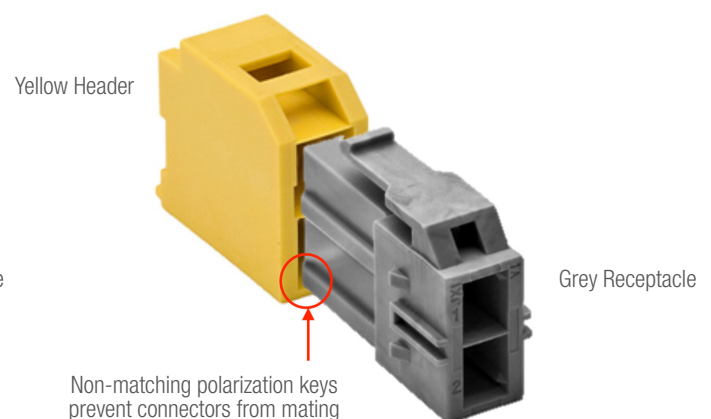

Connectors with different colors cannot mate

CP-6.5 Wire-to-Board Connectors, 2, 4 and 6 circuits

6.50mm Pitch, Polarized with Key and Color-Coding

molex[®]

Specifications

Reference Information

Packaging: Refer to table
Designed In: Millimeter
RoHS: Yes
Halogen Free: No
Glow-wire Compliant: No

Electrical

Voltage (max.): 600V AC
Current (max.): 2 to 10A
Low Level Contact Resistance (max.): 10 milliohms
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance (min.): 1,000 megohm

Mechanical

Insertion Force or Lock Strength (max.): 49.0N
Receptacle Crimp Pull-out Force: 14.7 to 127.4 N
Terminal Retention Force (max.): 39.2N
Durability (max.): 30 cycles

Physical

Housing:
Polyamide (PA), glass-filled, UL94V-0 (151048)
PBTB (151049)
Contact: Copper Alloy
Plating:
Contact Area — Tin
Solder Area — 1.27micron Matt Tin over
1.27micron Nickel underplate
Operating Temperature: -40 to +105°C

Ordering Information

Series No.	Component
151048	Vertical PCB Headers
151049	Receptacle Housings
50597	Receptacle Terminals, AWG 16 to 22, diameter 3.30 to 2.00mm
50598	Receptacle Terminals, AWG 20 to 26, diameter 2.35 to 1.25mm
51143	Retainer

www.molex.com/link/cp65.html